FIRE EXTINGUISHERS

HFC-227ea CLEAN AGENT CEILING

HFC-227ea is a Clean, Safe fire-fighting Agent that has excellent Fire Suppression Properties for use in Total Flooding Automatic Extinguishing Systems. HFC-227ea Automatic Fire Extinguisher Series is Ideal to Protect and Combat Fires in Engine Compartments for Land or Maritime Applications. This Automatic Extinguisher Series can be used for applications such as trucks, small boats, large boats, computer rooms, motor sport and engine plant rooms It can be used on class A, B and C fires and is also safe to use on live electrical fires.

One Unit must be installed per compartment to provide complete protection – the Protected Volume is specified by the Extinguishing Agent of the Extinguisher.

Optionally there is a low pressure warning switch which can be fitted to the Sprinkler Valve of the Extinguisher. The device continuously monitors the Extinguisher's Pressure and in the event of the pressure dropping below 10bar the switch to enable a signal to an Alarm Unit.

HFC-227ea shall not be used on fires involving the following materials unless they have been tested to the satisfaction of the authority having jurisdiction.

- Certain Chemicals or mixtures of Chemicals, such as Cellulose Nitrate and Gunpowder, that are capable of rapid oxidation in the absence of Air.
- Reactive Metals such as Lithium, Sodium, Potassium, Magnesium, Titanium, Zirconium, Uranium and Plutonium.
- Metal Hydrides.
- Chemicals Capable of undergoing auto-thermal decomposition, such as certain organic peroxi - dase and hydrazine.

General Characteristics

- **Ozone Friendly**
- **Leaves No Residue**
- **Mounting Bracket is Included**

  Suitable for Class A, B and C fires
- **Safe for Use on Electrical Fires**
- **CE Approved 68°C Sprinkler Valve**
- **Volume Coverage From 1.2m³ Up to 10m³**
- **Optional Pressure Switch**
- **15Bar Stored Pressure (Nitrogen)**

UL LISTED GAS

HFC-227ea CLEAN AGENT CEILING

- Non - Corrosive
- Ideal for Protection of Great Value Equipment
- Does not Harm the Ozone
- Safe for Places with Human Presence

Environmentally Responsible Choice!

FIRE EXTINGUISHERS

CEILING CLEAN AGENT / HFC-227ea

The Unique Ceiling Fire Extinguishers in the Market with PT 26bar and Thickness 2.5mm Providing Strongest Security

LISTED GAS

NEW

CODE **0135424**

MBK21 - HFC - 2

Automatic Ceiling **2Kg HFC-227ea** Fire Extinguisher

- 68°C Sprinkler
- Height 27,6cm
- Diameter 24cm

CE VESSEL & SPRINKLER

UL Certified HFC Agent

NEW

CODE **0135425**

MBK21 - HFC - 4

Automatic Ceiling **4Kg HFC-227ea** Fire Extinguisher.

- 68°C Sprinkler
- Height 40,5cm
- Diameter 21,3cm

CE VESSEL & SPRINKLER

UL Certified HFC Agent

NEW

CODE **0135426**

MBK21 - HFC - 8

Automatic Ceiling **8Kg HFC-227ea** Fire Extinguisher.

- 68°C Sprinkler
- Height 37cm
- Diameter 30,2cm

CE VESSEL & SPRINKLER

UL Certified HFC Agent

METALLIC pressure gauge with testing hole

CODE **0124046**

MBK07 - MBK - CPCEILING

Automatic Ceiling Fire Extinguishers Fill - in Coupling

CODE **0141130**

MBK14 - CEILING - PRESS

Pressure Switch for Ceiling Fire Extinguishers

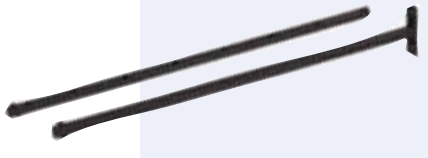

CODE **0114052**

KX11 - ACE - ADB

Adjustable Length Bracket suitable for multi height installation of Automatic Ceiling Fire Extinguishers. Mounting of the Automatic Ceiling Fire Extinguisher with bolt and nut. Length from 80 until 150cm.

CE **SPRINKLER**

CEILING BRACKET with bolt and nut for quick and easy installation



CONICAL HOOP with aligned holes for better and overall discharge, direct control of the pressure gauge as well as easy refilling of the fire extinguishe

FIRE EXTINGUISHERS

CEILING CLEAN AGENT / HFC-227ea

CLEAN AGENT

NEW

CODE **0501110**

MBK18 - 030HFC - P1A

3Kg	CLEAN AGENT	34B

Fire Extinguisher **CLEAN AGENT / HFC236 - fa 3Kg**
With Valve with Manometer Safety Valve
> INCLUDED METAL BASE

- Non - Corrosive
- Brass Nickel Closure
- Ideal for Equipment Protection with Great value
- Does not Harm the Ozone
- Safe for Areas with Human
- Presence

NEW

CODE **0501109**

MBK18 - 060HFC - P1A

6Kg	CLEAN AGENT	5A 55B

Fire Extinguisher **CLEAN AGENT / HFC236 - fa 6Kg**
With Valve with Manometer Safety Valve
> INCLUDED METAL BASE

METALLIC pressure gauge with testing hole

Stainless steel valve safety pin

Stainless Steel Safety Pin

Year Of Manufacture Ring with indelible fonts

Fire Extinguisher's Wall Mounted Metallic Bracket

EPDM Foam Discharge Hose, with galvanized clips and couplings, plastic handle, and reinforced magnet in order to bypass time-wasting procedures.

Special Type Nozzle made from Reinforced Plasticorder to bypass time - wasting procedures.

Individual Packing with White Carton Box

*THE TECHNICAL CHARACTERISTICS OF THE BELOW TABLE **ARE NOT** ALL VALID FOR SOME PRODUCTS*